


# Ditch Pump

## Challenger Model DP-8 & DP-6



**Model DP-8 Ditch Pump-8" (203.2 mm) discharge**

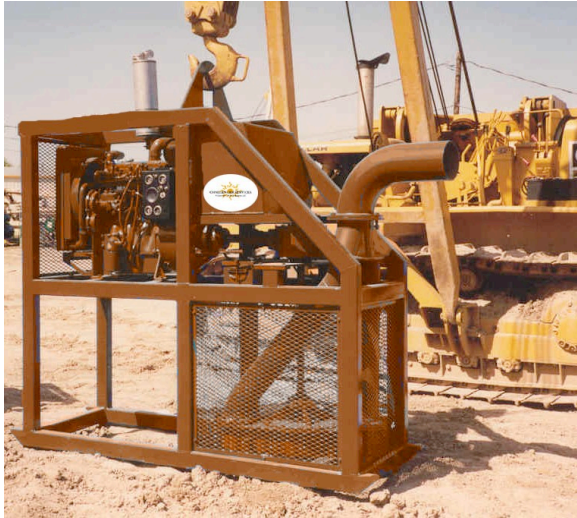

**Model DP-6 Ditch Pump-6" (152mm) discharge**

### Standard Package Includes:

- Caterpillar Model 3054 diesel engine-rated 68 h.p. at 2,000 rpm. (Deutz engine offered as an option).
- Vertically driven 8" centrifugal pump (P.T.O. engaged and disengaged).
- Removable bolt-on screens surrounding the pump.
- Rugged frame of 3" X 4" rectangular steel tubing with skid runners.
- 30 gallon capacity fuel tank.
- Removable lifting bracket.

### Features:

- Self-priming.
- Very tolerant of some debris in the water.

### Specifications:

- Operating weight (w/o fuel) 2,750 lbs. 1,247 kg
- Overall Length 94 inches 2,387 mm
- Overall Height 96 inches 2,438 mm (with exhaust pipe & lifting bracket removed)
- Overall Width 34 inches 8.64 mm
- Rated Capacity 2,500 GPM 9,463LPM

### Standard Package Includes:

- Deutz Model F3L 1011 diesel engine-rated 42 h.p. at 3,000 rpm.
- Vertically driven 6" centrifugal pump (P.T.O. engaged and disengaged).
- Removable bolt-on screens surrounding the pump.
- Rugged frame of 3" X 4" rectangular steel tubing with skid runners.
- 25 gallon capacity fuel tank.
- Removable lifting bracket.

### Features:

- Self-priming.
- Very tolerant of some debris in the water.

### Specifications:

- Operating weight (w/o fuel) 2,600 lbs. 1,179 kg
- Overall Length 94 inches 2,387 mm
- Overall Height 96 inches 2,438 mm (with exhaust pipe & lifting bracket removed)
- Overall Width 28 inches 7.11 mm
- Rated Capacity 2,200 GPM 8,350LPM