




Challenger Services CLAMPS

Internal Pneumatic Line-Up Clamp

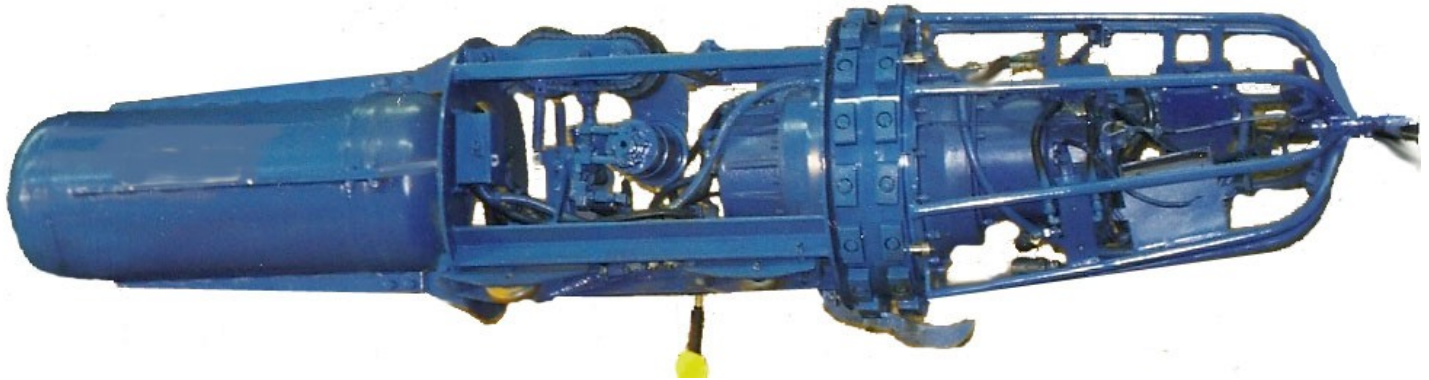

INTERNAL PNEUMATIC LINE-UP CLAMP For pipe from 10" (273mm) to 60" (1524mm)

FEATURES

- The Challenger Services Internal Pneumatic Line-Up Clamp (IPLC) is available in sizes 6" to 60".
- Clamps 12" to 60" will cover two pipe sizes by use of conversion kits.
- Standard clamps are adjustable up to .500 wall thickness. Modified clamps are available for heavier wall pipe.
- Powered travel drive available on 12" to 60" models.
- For efficient operation, the compressed air pressure should be 180-200 PSI. (12.4–13.8 Bar)
- Maximum safe working pressure is 225 PSI (15.5 Bar).